

LUBRICATION FITTINGS


Internal Ball Checks

Internal Single Ball Checks

Service to 10,000 PSI




SINGLE BALL CHECK, SOFT SEAT

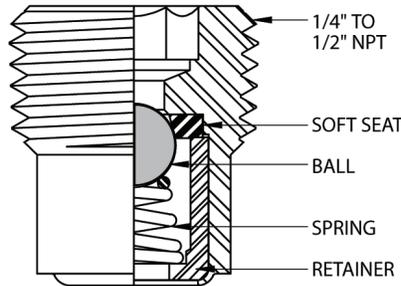

THREAD SIZE	MATERIAL	HEAT TREATMENT	PLATING	SPRING	BALL(S)	OAL	PART #
1/2" NPT	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	15/16"	FI407520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI407530
3/8" NPT	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	7/8"	FI307520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI307530
1/4" NPT	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	3/4"	FI207520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI207530
	316 SS	Annealed (NACE)	N/A			21/32"	FI207620
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI207630

SINGLE BALL CHECK, HARD SEAT

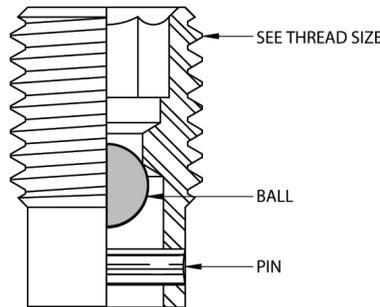

THREAD SIZE	MATERIAL	HEAT TREATMENT	PLATING	SPRING	BALL(S)	OAL	PART #
1" 8 UNC	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	1 9/16"	FI810520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI810530
7/8" 9 UNC	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	1 7/16"	FI710520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI710530
3/4" 10 UNC	316 SS	Annealed (NACE)	N/A	Inconel X750	K-Monel	1 1/4"	FI610520
	4140	Rc 22 MAX. (NACE)	Zinc Cobalt				FI610530