


LUBRICATION FITTINGS

Plug Valve Fittings


With Giant Button Head, Double Ball Check
Check & Bleeder Groove



ORDERING INFO AND SPECIFICATIONS

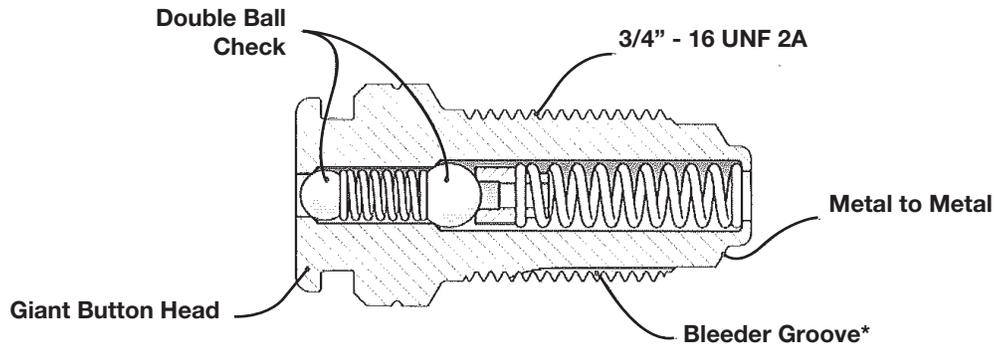

THREAD SIZE	MATERIAL	PLATING	SPRING	BALL(S)	PART #
3/4\"- 16 UNF 2A	4140	4140 Zinc	X750 Inconel	K-Monel	FG620530

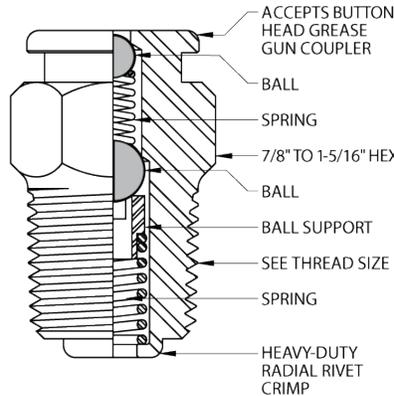

THREAD SIZE	MATERIAL	PLATING	SPRING	BALL(S)	PART #
1/4\" NPT	1215*	Zinc Cobalt	302SS	CA	FG200510
	316 SS	N/A	X750 Inconel	K-Monel	FG200520
	4140	Zinc Cobalt			FG200530

**or substitute material which meets or exceeds 1215*

*Bleeder Groove allows any valve body pressure to release as fitting is unscrewed from the valve. Double ball check ensures safety for high pressure applications.