


ADDITIONAL PRODUCTS

Casing Vent Assembly
2,000 PSI Casing Vents



DESCRIPTION

The standard 2,000 PSI Casing Vent Assemblies include 2" 2,000 PSI ball valves, 2" XH nipples, and 90° elbow and 180° return bend.

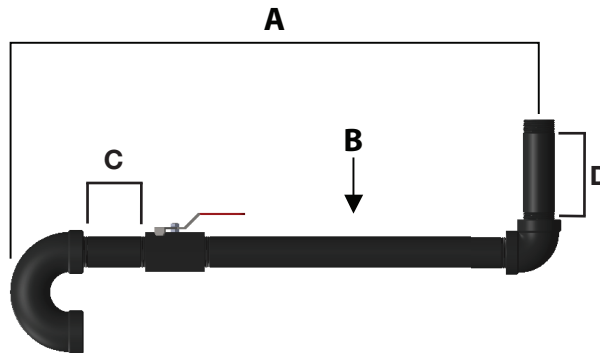

FEATURES

- 2" 2,000 PSI RP, NACE G-104 Ball Valve
- 2" XH A106B Nipples
- 2" 90° 2,000 PSI A105 Elbows
- 2" 180° Black Malleable Iron Return Bend

ORDERING INFO AND DIMENSIONS

A	B	C	D	PART #
26"	12"	6"	8"	CV110012
30"	16"	6"	8"	CV110016
38"	24"	6"	8"	CV110024
46"	32"	6"	8"	CV110032
50"	36"	6"	12"	CV110036
62"	48"	6"	12"	CV110048

ADDITIONAL PRODUCTS


Casing Vent Assembly

5,000 PSI Casing Vents



DESCRIPTION

Our special 5,000 PSI Casing Vent Assemblies include 2", 5,000 PSI ball valves, 2" XXH nipples, and 90° elbow and 180° return bend.

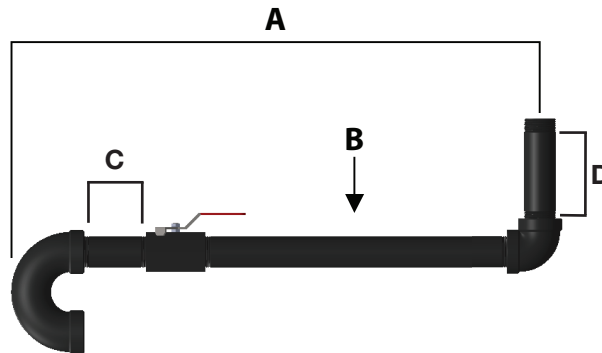

FEATURES

- 2" 5,000 PSI RP, NACE G-205 Ball Valve
- 2" XXH A106B Nipples
- 2" 90° 6,000 PSI A105 Elbows
- 2" 180° Black Malleable Iron Return Bend

ORDERING INFO AND DIMENSIONS

A	B	C	D	PART #
26"	12"	6"	8"	CV250012
30"	16"	6"	8"	CV250016
38"	24"	6"	8"	CV250024
46"	32"	6"	8"	CV250032
50"	36"	6"	12"	CV250036
62"	48"	6"	12"	CV250048